



# Tiger Lifting



[www.tigerlifting.com](http://www.tigerlifting.com)


**Tiger**

Home of the Tiger hoisting, winching and height safety ranges

## Armour Ratchets from Tiger The World's First Side Loading Ratchet

### Main Features

- Patented Design
- Manufactured and labelled in accordance with BS EN 12195-2:2001
- Quickest & easiest to use ratchet available – 2x faster than a standard ratchet
- Saves time – only unwind as much strap as needed
- Strong – 50mm range breaking force of 5,000daN and 32mm range up to 2,000daN (equivalent of 37mm standard products!)
- Dramatically easier to unload in icy conditions
- Less frustration & smoother ratcheting function
- Lots of room around the handle
- Finger grip rubber handle
- Comes with a variety of hooks
- Other strap lengths and colours available – please contact us for details

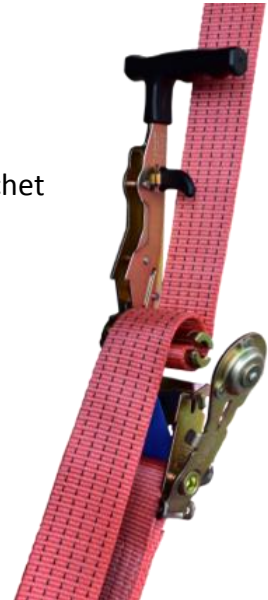

### Single Sided Handle

Creates a lot more room for the operator's hand

### Smoother Ratcheting

Both gears are located on one side of the ratchet; this means the Armour ratchet has a smooth ratcheting function compared with most conventional ratchets

### Zinc Plated Finish



Rubber Grip

Rubber Release Lever

Locking Device

Ensures the side gate cannot open when the ratchet is in use

Armour Side Gate

Key innovation which allows the strap to be loaded from the side rather than threaded through the spool – quicker and a lot less frustrating!





# Tiger Lifting



[www.tigerlifting.com](http://www.tigerlifting.com)

**Tiger**

Home of the Tiger hoisting, winching and height safety ranges

## Fittings


Standard Fitting:  
Claw hook.

Alternative fittings:  
Delta ring or Chassis hook available  
at no extra cost:

Optional extra fittings:  
Flat snaphook, Twisted snaphook,  
Claw hook with catch




## 2000DaN Option - TAR-02

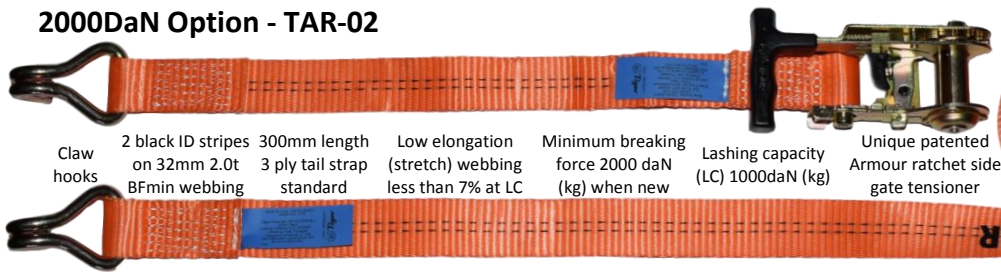

Claw hooks 2 black ID stripes on 32mm 2.0t BFmin webbing 300mm length 3 ply tail strap standard Low elongation (stretch) webbing less than 7% at LC Minimum breaking force 2000 daN (kg) when new Lashing capacity (LC) 1000daN (kg) Unique patented Armour ratchet side gate tensioner

## 5000DaN Option - TAR-05

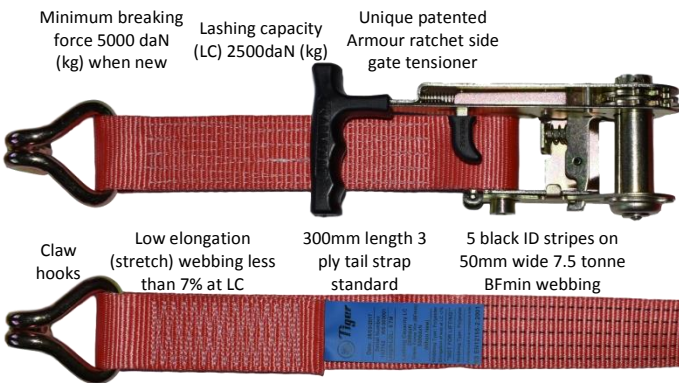

Minimum breaking force 5000 daN (kg) when new Lashing capacity (LC) 2500daN (kg) Unique patented Armour ratchet side gate tensioner

Claw hooks Low elongation (stretch) webbing less than 7% at LC 300mm length 3 ply tail strap standard 5 black ID stripes on 50mm wide 7.5 tonne BFmin webbing

Other strap lengths and colours available – please contact us for details

## Technical Data

Product Code	Description	Lashing Capacity (daN)	Minimum Breaking Force (daN)	Strap Length (m)	Strap Width (mm)	Weight (Kg)
TAR-02-06	2 part with end fittings	1000	2000	6.0	32	1.0
TAR-04-10	2 part with end fittings	2000	4000	10.0	50	TBA
TAR-04-10-E	Endless	2000	4000	10.0	50	TBA
TAR-05-10	2 part with end fittings	2500	5000	10.0	50	2.8
TAR-05-10-E	Endless	2500	5000	10.0	50	TBA
TAR-05-005	Single part with end fitting	2500	5000	0.5	50	1.4

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

